

Tillage



www.kvernelandgroup.com



Narrow transport width



Uniform depth control

CTC MODELS are designed for one-pass seedbed preparation and are the ultimate residue management tool. Leafspring auto-reset shanks are heat treated tubular steel allowing them to flex laterally up to 8" in each direction.

Unique depth control system maintains consistent depth so "sour" soil is not brought into the seedbed zone. Working widths of 12'1", 16'5", and 19'9"

KNOCK-ON SYSTEM

Fast and easy changing of points and shares. Change points in *minutes* with a hammer and the special wedge tool designed specifically for the knock on system.

The system is based on a holder and a share locking together when struck with a hammer and wedge tool.

High quality steel provides high pressure, locking the share to the holder.



KNOCK-ON



CLC PRO PLUS 350 3 Point Hitch models are for lower horsepower tractors with the same features and performance as the CTC.



THE QUALIDISC offers optimum soil and residue incorporation. Utilizing two rows of oversized disc blades mounted on a heavy frame, the Qualidisc can be equipped with several types of rollers depending on soil conditions. Independently mounted discs with a fixed cutting angle are protected with a special rubber shock design that allows movement both vertically and laterally. 3 point hitch models are close coupled to allow operation with lower horsepower tractors.

- Allows high speed, even, stubble cutting and incorporation in all conditions
- Individually mounted, heat treated 22" discs, at a fixed angle
- Discs are mounted with rubber shock absorbers, hubs feature maintenance free fully protected double ball bearings
- Full adjustability to maintain cutting quality as discs wear
- Coil tine harrow followed by Actiring or Actipack roller
- Available as a 3-point in 9' 8", 11' 3", 13' 2", 16' 5" and 19' 9" widths or pull type in 13' 2", 16' 5", 19' 9" and 23' widths
- 2 year warranty



World plowing champions for conventional and reversible plows.
Kverneland's reputation for the best plows is well earned.



Power harrows for ultimate seedbed preparation. Models from 10' to 20'.



Complete range of standard and rollover plows.



Distributed by:



www.cummingsandbricker.com
support@cummingsandbricker.com

Batavia NY (800) 252-1552
Carlisle PA (800) 222-8969

Call us or contact your local dealer for additional information.

Tillage



www.monroetufline.com

Tufline carries a full line of agriculture equipment to cover every tillage need. From small horsepower tractors up to 200+ horsepower models, the agricultural line offers tandem lift and wheel disc harrows, as well as offset lift and wheel disc harrows for producing seed beds in all types of conditions. A line of specialty equipment ranges from disc plows, v-plows, and subsoilers for deep tillage applications, to row disc and pasture renovators for more specific uses.



TRACTOR MOUNT DISC HARROWS

Three point disc models to fit tractors from 12-100 horsepower. The heavy duty disc range from 4' up to 10' 6" cutting widths.



PULL TYPE DISCS

Pull type discs fit tractors from 35-160 horsepower. Discs are built with heavy duty main frames designed for rugged conditions and offer a full range of options from varied blades and spacing to heavy scrapers and shock flex hangers.



TANDEM DISC HARROWS

The tandem disc offers a full range of options for different horsepower tractors and applications. Each is manufactured with heavy duty mainframes designed for rugged conditions and are customizable with different blade sizes and spacings to scrapers and outrigger kits.



OFFSET DISC HARROWS

The offset lift disc harrows combine quality manufacturing and flexible options to match almost any horsepower tractor and deep tillage requirement. Adjustable gang angles allow the unit to loosen and lift the soil they cut.

Specialty Equipment



HEAVY DUTY SUBSOILERS designed for 30 to 130 horsepower tractors. One and two shank models are mounted on a 7" x 5" tube frame and come with 24" or 28" shanks. The three shank models are mounted on a 7" x 5" and 3" square tube frame and come with 24", 28" or 32" shanks.



V PLOWS are designed for 60 to 200 horsepower tractors. They mount with a three point hitch with Category 2 and 3 lift pins standard with Category 3 Quick Hitch optional. The mainframe is constructed of 7" x 5" tube and come with 28" or 32" x 1 1/4" shanks with heat treated points.



ROW DISC BEDDERS are specifically designed for high residue bedding operations where raised beds at different widths are needed. Tufline's Row Disc are fully adjustable to your needs and create a consistent bed for planting.

Distributed by:




www.cummingsandbricker.com
support@cummingsandbricker.com

Batavia NY (800) 252-1552
Carlisle PA (800) 222-8969

Call us or contact your local dealer for additional information.

Tillage



COMPACT DISC HARROW

Designed for optimum soil and residue incorporation the compact disc harrow is a universal tool capable of cultivation depths from 2" to 6". Used after harvest or before planting the harrow doesn't just cover the remaining vegetation but perfectly mulches it with the top layer of soil. Available as 3 point hitch (9' 10", 14' 10" or 19' 9" widths) or pull type (14' 10" or 19' 9" widths).

SOIL TYPES/FIELD CONDITIONS

It may be used on all types of soils including those with stones thanks to the rubber shock system. The harrow helps open and mix the soil while the packer packs and compresses the soil. Due to the resistance to clogging the harrow is well suited for the cultivation of tall stubble.



Available up to 26' wide



PACKER ROLLER: A heavier roller good for crushing clods and firm soil compaction.



PIPE ROLLER: For light to medium soil and dry working conditions.



RUBBER RING ROLLER: Ideal for variable soils. Doesn't sink in light soils



DD HEAVY ROLLER: Excellent roller for heavy, rocky soils with high organic content.

WORKING DEPTH

The working depth of the harrow discs may be adjusted using the tractor's 3 point hitch or the mechanical or hydraulic shaft adjustment mechanism.



3 point hitch



Folding Trailed

	U740	U71045/T	U71060/T
Operating Width	9' 10"	14' 10"	19' 9"
Number of Discs	24	36	48
Diameter of Discs	22"	22"	22"
Number of Tines	24	36	48
Max Depth	6"	6"	6"
Operating Speed	5-9 mph	5-9 mph	5-9 mph
Productivity	7-12 acres/hr	10-16 acres/hr	12-20 acres/hr
Power Requirements	100-140 HP	180-270 HP	200-320 HP



www.ab-eagleline.com

A&B Eagle Line: 3 point hitch attachments for compact tractors.

ATTACHMENTS



One, two, and three bottom plows in 12", 14", or 16" bottoms with shear



6 and 7 shank pasture renovators.

3 point hitch disc harrows from 4'4" to 11'4" working widths. 258# to 1600# weight.



High clearance row crop cultivator.



Single shank subsoiler

Distributed by:



www.cummingsandbricker.com
support@cummingsandbricker.com

Batavia NY (800) 252-1552
Carlisle PA (800) 222-8969

Call us or contact your local dealer for additional information.

Tillage



Farm & Garden Equipment
DelMorino

www.delmorino.it

ROTOTILLERS



FLASH MODELS in 33", 41" and 49" widths for 12-24HP tractors with a center gearbox design.

- Adjustable cat 1 3 point hitch
- Oil bath gear drive central transmission w/shear bolt protection
- 4 blades per flange
- Adjustable skids

HRA MODELS in 89" and 98" widths for 50-95HP tractors.

- Adjustable Cat 2 three point hitch.
- 6 blades per flange
- Adjustable skids



URT MODELS up to 75", 80", and 87" width available for 15-50HP tractors and a heavy duty chain drive. 2 year warranty.



KODIAK
BY PALADIN

www.kodiakmfg.com

ATTACHMENTS

*Kodiak not sold by C&B in Ohio

Gear Driven Rototillers available in 4', 5' and 6'.

- Powder Coat Finish
- Extended Torque Tube for Added Structural Integrity
- Adjustable rear deflector shield controls dirt for smooth finish
- Rugged Gear Drive Transmission
- Slip Clutch is Standard
- Category 1 Quick Hitch
- Long Life Hard Carbon Steel Tines
- Replaceable Skid Shoes



Distributed by:



www.cummingsandbricker.com
support@cummingsandbricker.com

Batavia NY (800) 252-1552
Carlisle PA (800) 222-8969

Call us or contact your local dealer for additional information.



Tillage



www.knowlesmfgco.com

SPRING TOOTH HARROWS

Pull type, and combination 3 point and pull type spring tooth harrows working widths from 6' to 38'.

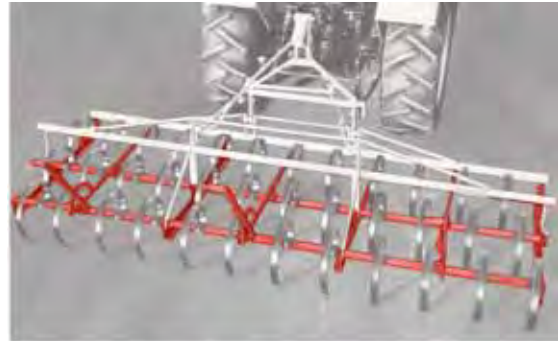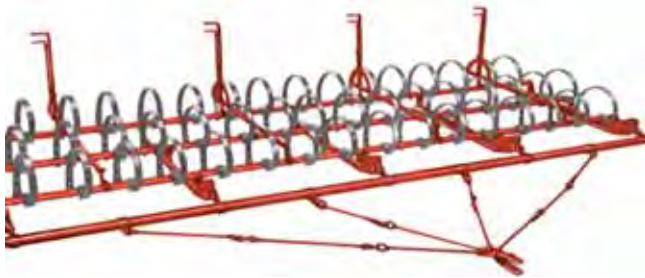

www.maybridgeharrows.com

CHAIN HARROWS

Versatile chain harrows made of 1060 Hi-Carbon 5/8" diameter steel for long life. 3" teeth on both sides. Self cleaning due to the unique tooth arrangement and framework.



- Prepare seedbeds
- Cover seed
- Incorporate herbicides
- Spreading manure
- Horse track grooming
- Landscaping
- Hay and pasture renovation
- Models from 4'4" to 26'.



Distributed by:



www.cummingsandbricker.com
support@cummingsandbricker.com

Batavia NY (800) 252-1552
Carlisle PA (800) 222-8969

Call us or contact your local dealer for additional information.