

Vicon Spreaders



www.vicon.eu

Innovative high performance equipment for over 100 years.

SPREADERS



SUPERFLOW PENDULUM SEEDER/SPREADERS

Over one million machines have been sold since Vicon founder Hermanus Vissers developed the first pendulum style fertilizer spreader in the early 1900's. The Vicon pendulum seeder/spreader is the first choice wherever the demand is for maximum accuracy in fertilizer application. Spreading quality and ease of operation of this unique machine are unequalled - now as in the past. The pendulum movement of the spout ensures that the application rate is always identical on both sides. This results in an excellent overlap.

- Capacities from 400# to 3750#.
- Spread widths up to 60' with some models.




A wide selection of spouts for special applications illustrates the versatility of Vicon spreaders.



NO OVERSPRAY

Unlike spinner type spreaders, material is kept close to the tractor. No "overspray" onto the tractor or the machine. Spread pattern allows for more forgiveness due to the overlap.



ROTAFLOW SPREADERS

The heart of all Vicon disc spreaders. Fertilizer always flows in a rotating motion from the accelerator chamber to the spreading vanes. The benefits of this design are:

- No impact, no fragmentation, no dust
- Accurate spread pattern
- Minimal wind influence
- Consistent spread pattern
- Guaranteed accuracy on slopes



TRIMFLOW border spreading option handles all types of fertilizer. No need to leave the tractor seat.



Double overlap spread pattern. Spread widths up to 148' with capacities up to 8200 lbs.



Flow Pilot easy setting and adjustment.

RO-EDW MODELS use 4 weigh cells and a reference sensor to accurately transmit weight information to the tractor's Isobus system. EDW units plug directly into the tractor's system or the complete Vicon Tellus Isobus system can be installed if the tractor does not have a factory unit.



Distributed by:



www.cummingsandbricker.com
support@cummingsandbricker.com

Batavia NY (800) 252-1552
Carlisle PA (800) 222-8969

Call us or contact your local dealer for additional information.

Vicon Spreaders



www.vicon.eu

Innovative high performance equipment for over 100 years.

SPREADERS



VICON RO-EDW GEOSPREAD SPREADER. Vicon is again setting the standards on even more accurate spreading with GPS possibilities on ROEDW weighing spreaders.

THE RO-EDW GEOSPREAD is equipped with two actuators on each dosing unit. One of these actuators controls the setting of the discharge point of the dosing cup onto the disc. The other controls the application rate. The GEOSpread system makes it possible to adjust the setting individually for both discs electrically from the tractor cab. This means the working width can be easily adjusted quickly and accurately just by touching the ISOBUS terminal! The GEOSpread system can be operated by every ISOBUS Universal Terminal with section control capabilities.



Full spreading width 148' with 22 sections.



Decreasing the spreading width on the right hand side by 20'.




Decreasing the spreading width on the left hand side by 30'



Decreasing the spreading width on both sides by 26'

ADVANTAGES OF GEOSPREAD

1. Quick and accurate spreading, due to the actuators being directly connected to the discharge point.
2. Stable disc RPM in combination with discharge point adjustment maintains the spreading pattern (coefficient of variation).
3. Easy operation; no need to step off the tractor to adjust the working width
4. 100% ISOBUS compatible for easy operation

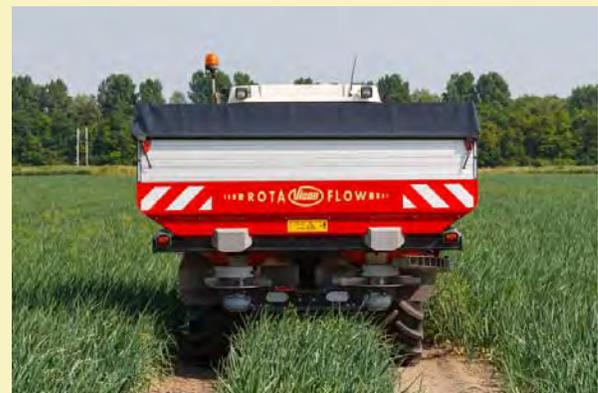

The RO-EDW GEOSpread is probably the most intelligent system for spreading with GPS on the market.

Distributed by:



www.cummingsandbricker.com
support@cummingsandbricker.com

Batavia NY (800) 252-1552
Carlisle PA (800) 222-8969

Call us or contact your local dealer for additional information.