

CUMMINGS & BRICKER
 www.cummingsandbricker.com
 support@cummingsandbricker.com

Effective: 02/15/2021
 Revised: 06/23/2021



CUTTER CADDY

| ITEMNUMBER | DESCRIPTION | WEIGHT |
|------------|--|--------|
| CC3 | Cutter Caddy-Fixed Height-Even Tires-Mowers Up To 10'6" | 1500 |
| CC3HL | Cutter Caddy-Hyd Lift-Even Tires-Mowers Up To 10'6" | 2500 |
| CC2 | Cutter Caddy-Fixed Height-Offset Tires-Mowers Up To 9'6" | 1176 |
| CC2HL | Cutter Caddy-Hyd Lift-Offset Tires-Mowers Up To 9'6" | 1396 |
| CC3WK | Aux Weight Kit-May Be Needed For Some 10'6" Mowers | |
| CC2WK | Auxilliary Weight Kit | |

Current Pricing NOT VALID. DURABILT MUST BE Quoted Directly From C&B.

Cutter Caddies

- Improved turning capability
- Easy tractor hookup
- Improved flotation for mower
- Easy bolt-on application for disc mowers
- Fixed height and hydraulic lift models
- Accommodates mowers up to 10'6"

*Check whether the mower to be used requires the tractor 3 point hitch to be raised prior to raising the disc mower into transport position. As of this time the following mowers require a hydraulic lift cutter caddy: Kuhn (including any OEM machines produced by Kuhn-JD,Gehl). **Vicon** mowers do not require a hydraulic lift Cutter Caddy.



Even wheel design, as opposed to offset wheels, provides more stability and eliminates tire dragging on turns.

With more weight placed ahead of the mower the caddy can be unhitched from the tractor with the mower in transport position. Mowers up to 10'6" can be used. Offset wheel models also available:



Width: 84"
 Length: 13'



TUMBLEBUG

| ITEMNUMBER | DESCRIPTION |
|------------|--|
| TB1810 | Tumblebug Single Bale Transporter - Add Wheels And Tires |
| TBTIRE | Set Of Two Mud & Snow Tires For Tumblebug - 15" Rims |
| TB1850UR | Tumblebug Unroller Kit |
| TBWIRE | Tumblebug Extra Tow Vehicle Wiring Kit |

Current Pricing NOT VALID. DURABILT MUST BE Quoted Directly From C&B.

TUMBLEBUG

- No winches, ropes, or hydraulics
- Works with a truck or tractor
- 2" ball coupler
- 12V electric brakes
- Wiring kit for towing vehicle


OA length: 144"
Width between wheels: 82"



1 Back up to a bale, engage brake switch



2 Continue backing until loading arm falls over frame of cradle and touches hay

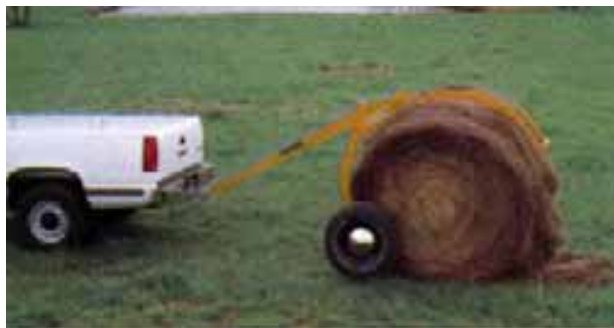

3 Pull forward slowly and the bale rolls on the cradle



4 Disengage switch (release brakes) and go



LANDSCRAPERS

| ITEMNUMBER | DESCRIPTION | WEIGHT |
|------------|---|--------|
| LS06 | Landscaper-6'-Complete W/Tires,Cylinder,Hoses & Jack | 1082 |
| LS08 | Landscaper-8'-Complete W/ Tires,Cylinder,Hoses & Jack | 1260 |
| LS10 | Landscaper-10'-Complete W/Tires,Cylinder,Hoses & Jack | 1500 |
| LS12 | Landscaper-12'-Complete W/Tires,Cylinder,Hoses & Jack | 1740 |
| LS14 | Landscaper-14'-Complete W/Tires,Cylinder,Hoses & Jack | 1980 |
| LS12HD | Landscaper-12' Heavy Duty- Complete W/Tires,Cylinders,Hoses & Jack | 2040 |
| LS14HD | Landscaper-14' Heavy Duty- Complete W/Tires, Cylinders,Hoses & Jack | 2230 |

**Current Pricing
NOT VALID.
DURABILT
MUST BE
Quoted Directly
From C&B.**

LANDSCRAPER

- Grade roads and driveways
- Landscape lawn & farm yard
- ½" x 6" cutting edge, 20" Moldboard Height
- Complete with tires, jack, cylinder & hoses

| MODEL | WIDTH | Min. HP. | LENGTH | TIRES | TONGUE | WEIGHT |
|-----------------------|-------|----------|--------|---------------|---------------------------|--------|
| LS-06 (Fixed Tongue) | 6' | 40 | 12'6" | 7.60/15 | 4"x4" WELDED | 1082# |
| LS-08 (Fixed Tongue) | 8' | 40 | 12'6" | | | 1260# |
| LS-10 (Swivel Tongue) | 10' | 50 | 14'6" | 11L/15 | 4" x6" BOLTED (SWIVEL) | 1500# |
| LS-12 (Swivel Tongue) | 12' | 60 | 14'6" | | | 1740# |
| LS-14 (Swivel Tongue) | 14' | 80 | 14'6" | | | 1980# |
| LSHD12 Heavy Duty | 12' | 80 | 14'6" | | | 2040# |
| LSHD14 Heavy Duty | 14' | 80 | 14'6" | 2 pair 11L/15 | | 2230# |
| TS08/CTS08 Tilting | 8' | 40 | 12'6" | 7:60/15 | | |
| TS10/CTS10 Tilting | 10' | 50 | 14'6" | 11L/15 | | 1532# |
| CTS12 Tilting | 12' | 60 | 14'6" | 11L/15 | | 1710# |



Tilt Landscrapers



CTS Models with Center Tilt Axle.

TILT LANDSCRAPERS

| ITEMNUMBER | DESCRIPTION | WEIGHT | PRICE |
|------------|--|--------|--|
| TS08 | Landscaper-8'-W/Tilt-Complete W/Tires,Cylinders,Hoses & Jack | 1354 | Current Pricing NOT VALID. DURABILT MUST BE Quoted Directly From C&B. |
| CTS08 | Landscaper-8'W/Center Tilt Axle-Complete W/Tires, Cylinders, Hoses & Jack | 1354 | |
| TS10 | Landscaper-10'-W/Tilt-Complete W/Tires,Cylinders,Hoses & Jack | 1532 | |
| CTS10 | Landscaper-10'W/Center Tilt Axle-Complete W/Tires, Cylinders, Hoses & Jack | 1532 | |
| TS12 | Landscaper-12'-W/Tilt-Complete W/Tires, Cylinders, Hoses & Jack | 1740 | |
| CTS12 | Landscaper-12'W/Center Tilt Axle-Complete W/Tires, Cylinders, Hoses & Jack | 1740 | |
| TSLI | Level Indicator | | |



DIRT PAN

| ITEMNUMBER | DESCRIPTION | WEIGHT |
|------------|---|--------|
| DP60 | Dirt Pan-60"-1.5 Yard-Complete W/Tires,Cylinders,Hoses & Jack | 1500 |
| DP84 | Dirt Pan-84"-3 Yard-Complete W/Tires,Cylinders,Hoses & Jack | 1630 |
| DP84HC | Dirt Pan-84"-4 Yard-Complete W/Tires,Cylinders, Hoses And Jack | 2000 |
| DP84HCD | Dirt Pan 84"-4 Yard-Same As DP84HC Except With Clevis Hitch And Lift Axle | 2160 |

Current Pricing NOT VALID. DURABILT MUST BE Quoted Directly From C&B.

Dirt Pan

Provides an efficient means of scooping, lifting, and moving soil between points without dragging the soil.

- Attaches to bottom links of 3pt hitch (DP84HCDB uses a clevis hitch)
- Cutting depth controlled by 3pt hitch (DP84HCDB by lift axle)
- Dig angle and dump height controlled by cylinders-single remote required (double for DP84HCDB)

Complete w/tires, cylinders & hoses

| | DP60 | DP84 | DP84HC | DP84HCDB |
|---------------------|-------------------|------------------|------------------|------------------|
| Pan Capacity | 1.5 yard (Heaped) | 3 yards (heaped) | 4 yards (heaped) | 4 yards (heaped) |
| Cutting Width | 60" | 84" | 84" | 84" |
| Cutting Depth | 0-3" | | | |
| Dump Height | 0-8" | | | |
| Tires | 7.60 x15 | 11Lx 15 | Dual 11Lx15 | Dual 11Lx15 |
| Weight | 1500# | 1630# | 2000# | 2160# |
| Horsepower Required | 30-60 HP | 60-100 HP | 80-120 HP | 80-120 HP |
| Cylinders | (2) 3" x 8" | | | (4) 3" x 8" |



DP84HCDB with dual tires, double cylinders



DP84HCDB with dual tires, drawbar, lift axle, and clevis hitch



CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com

Effective: 02/15/2021

Revised: 06/23/2021



SWIVEL SCRAPER

| ITEMNUMBER | DESCRIPTION | WEIGHT |
|------------|--|--------|
| SS07 | Rear Blade W/Manual Angle Tilt And Offset - Heavy Duty | 480 |
| SS08 | Rear Blade W/Manual Angle Tilt And Offset - Heavy Duty | 530 |
| SSHOK | Hydraulic Offset Kit For Swivel Scrapers | |

**Current Pricing
NOT VALID.
DURABILT MUST
BE Quoted Directly
From C&B.**

Swivel Scraper

The Swivel Scraper is a heavy duty rear blade that can be tilted up to 24" from level. It can also be offset from the tractor seat up to 24" right or left with the optional swing cylinder.

FEATURES:

- Category 1 or 2, 3pt hitch
- Swivel 360 degrees
- 1/2" x 6" Reversible Cutting Edge
- Optional Swing Cylinder



| MODEL | Overall Width | HP Requirement | Shipping Weight |
|-------|---------------|----------------|-----------------|
| SS07 | 7' | 25 HP | 480 lbs. |
| SS08 | 8' | 35 HP | 530 lbs. |



PASTURE PUNCH AERATOR

| ITEMNUMBER | DESCRIPTION | WEIGHT |
|------------|---|--------|
| PP063PT | Pasture Punch-6' - 3 Pt Lift/ Weld On Spikes. Filled Weight 3100# | 1800 |
| PP08 | Pasture Punch-8'-W/Tires, Cylinder & Hoses. Filled Weight 4250# | 2450 |
| PP08SR | 8' Pasture Punch Plus 44" Diameter Smooth Roller Drum | |
| PP10 | Pasture Punch-10'-W/Tires, Cylinder & Hoses. Filled Weight 5045# | 2745 |
| PP10SR | 10' Pasture Punch Plus 44" Diameter Smooth Roller Drum | |
| PP12 | Pasture Punch-12'-W/Tires, Cylinder & Hoses. Filled Weight 5965# | 3143 |
| PP12SR | 12' Pasture Punch Plus 44" Diameter Smooth Roller Drum | |

Current Pricing NOT VALID. DURABILT MUST BE Quoted Directly From C&B.

Pasture Punch

- Used by:
- Sod Farmers
 - Hay – Pastures
 - Alfalfa Growers
 - Landscapers
 - Sports Complexes
 - Relieves Compaction
 - Promotes Air & Water Movement
 - Increases Decomposition of Dead Plant Matter
 - Relieve Root Bound Plants
 - Help Activate Fertilizer

| Model | Drum Width | Empty Weight | Filled Weight | Min. Hp. | Number of Tines |
|-------------------------------|------------|--------------|---------------|----------|-----------------|
| PP06- 3 Point | 64" | 1800# | 3100# | 45 | 55 |
| PP08 (Single Wheels) | 88" | 2450# | 4250# | 45 | 75 |
| PP10 (Single Wheels) | 112" | 2745# | 5045# | 60 | 100 |
| PP12 (Standard w/Dual Wheels) | 136" | 3143# | 5965# | 80 | 125 |

PP-SR Models include an interchangeable 44" smooth roller drum.

Tines are 3/4" thick, 7" long, and 4" wide at the base. Tines are hard surfaced. Drum diameter: 30"



Smooth Rollers(SR Models) are the same as Pasture Punch, less tines.

SMOOTH ROLLERS

| ITEMNUMBER | DESCRIPTION | WEIGHT |
|------------|---|--------|
| SR08 | Roller-8'-W/Tires,Cylinder & Hoses. Filled Weight: 5450# | 2450 |
| SR10 | Roller-10'-W/Tires,Cylinder & Hoses. Filled Weight: 6600# | 2745 |
| SR12 | Roller-12'-W/Tires,Cylinder & Hoses. Filled Weight: 7850# | 3143 |
| SR12HD | Roller Heavy Duty-12'-W/Tires, Cylinder & Hoses | 3600 |
| SR14HD | Roller Heavy Duty-14'-W/Tires, Cylinder & Hoses | 3850 |

Current Pricing NOT VALID. DURABILT MUST BE Quoted Directly From C&B.