



CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com

Effective: 01/19/2024

Revised: 02/23/2024

F.O.B. C&B



MOWERS

MULCHING MOWER WITH HYDRAULIC SINGLE SIDE DISC

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
HANDY140190	Mulching Mower 56" Body W/ 24" Hyd Side Disc, 79" Max Travel	926	\$13,055.00
HANDY230280	Mulching Mower 96" Body W/ 24" Hyd Side Disc, 113" Max Travel	1213	\$15,070.00

Handy Mower

Mower with rotating disc, suited to work on vineyards, orchards and solar farms.

- CAT I/II
- Front fixed wheels, height adjustable
- Height adjustable roller
- Cutting height from 1-5"
- Between-row rotating disc 24", spring return with rubber protection
- Articulated blades
- PTO drive shaft



	Width	Side Shift <i>(from center of tractor)</i>	HP	# of Carriers	# of Blades
Handy 140-190	58"-76"	27	40-90	2+1	4+2
		01			
Handy 230-280	94"-113"	38	40-90	3+1	6+2
		02			


EXPANDABLE MOWERS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
FLEXY170245	Mower Expandable 68" to 96"	1279	\$17,015.00

FLEXY - Expandable Mower

Mower with variable working width, suited to work on vineyards and orchard.

- Rear roller, height adjustable
- Front fixed wheels
- Articulated blades
- Hydraulically extends working width
- Side chutes for grass discharge
- Chain guards, front and rear
- PTO drive shaft
- CAT I/II

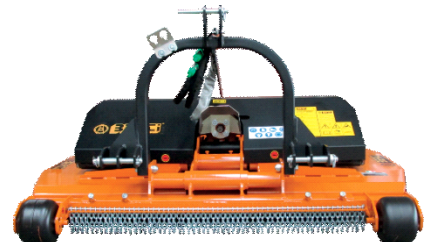

	Width	# of Discs	# of Knives	Horsepower	PTO
FLEXY 170-245	68" – 96"	2	4	40-100	540

100-120 LEHIGH AVE.
P.O. BOX 928
BATAVIA, NY 14021
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE
CARLISLE, PA 17015
PHONE: 800-222-8969
FAX: 717-249-9384



CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com

Effective: 01/19/2024

Revised: 02/23/2024

F.O.B. C&B



MOWERS

SINGLE DISC MOWERS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
RMADTL140240	Single Disc Mower 25" - Mechanical - Driven by Tractor Hydraulics (9 GPM)	628	\$8,625.00

Single Disc Mower

Mechanical disc-mower, ideal for environmental and mechanical control of weeds in vineyards, orchards and solar fields.

- Hydraulically driven
- CAT I/II
- Support Wheels
- Adjustable height
- 25" disc
- Mechanical reach-adjustment
- Manual tilt/height adjustment
- Spring return
- Hoses and couplers
- Flow regulator



R.M. AD-TL

	Horsepower	# of Blades	Width	Tilt	Weight (lbs.)
RM AD/TL 140-240	50 – 100	2	55" to 94"	From -45° to + 65°	628

BETWEEN ROW WEEDERS

WEEDER

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
ECOSPRINT90140	Between Row Weeder - 30" Head W/Wire-Spool, Self Contained Hydraulics	1166	\$14,715.00

ECOSPRINT - Between-Row Weeder

Hydraulic between-row weeder with single head, equipped with independent frame and hydraulics. Ideal for all environmental and mechanical control of the weeds in vineyard and orchard.

- Independent frame with 3-point linkage, CAT I/II
- Hydraulic cylinders for height and tilt adjustment of weeder head
- Hydraulic cylinder for side shift with hydraulic hoses and quick couplers
- Mechanical tensioning of the head
- Weeder head with wire spools
- Independent hydraulic system



VINEYARD WEEDERS	Width	Weight (lbs.)	HP	Degree of Pivot	# of Cords	Height
ECOSPRINT 90-140	30"	1169	40 – 100	-5° to +45°	16	4"

100-120 LEHIGH AVE.
P.O. BOX 928
BATAVIA, NY 14021
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE
CARLISLE, PA 17015
PHONE: 800-222-8969
FAX: 717-249-9384



MULCHERS

EXCAVATOR MULCHERS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
NKRSB80	30" Excavator Mulch Head - 2-4 Ton Excavators, 8-10 GPM, Y Blades (Less Mount)	400	\$5,300.00
GKRSB80	30" Excavator Mulch Head - 2.5-4 Ton Excavators, 10-12GPM, Hammers (Less Mount)	528	\$5,450.00
CKTSB100	36" Excavator Mulch Head - 4.5-5.5 Ton Excavators, 11-13GPM, Hammers (Less Mount)	695	\$7,085.00
CKTFX100	36" Excavator Mulch Head - 5-7 Ton Excavators, 11-14 GPM, Fixed Tooth (Less Mount)	695	\$14,010.00
PARKSB110	40" Excavator Mulch Head - 6-8 Ton Excavators, 16-18 GPM, Hammers (Less Mount)	1135	\$9,500.00
PARKFX100	37" Excavator Mulch Head - 7-11 Ton Excavators, 20-23 GPM, Fixed Tooth (Less Mount)	1411	\$16,550.00
TFXSB120	44" Excavator Mulch Head - 11-16 Ton Excavators, 28-30 GPM, Fixed Tooth (Less Mount)	2337	\$22,145.00
EFXMDSB140	51" Excavator Mulch Head - 15-20 Ton Excavators, 34-37 GPM, Fixed Carbide Hammers (Less Mount)	2772	\$27,710.00

EXCAVATOR HYDRAULIC MULCHING HEADS

NKR/SB - 2-4 Ton Mini Excavators

1.2" Cut Diameter
8-10 GPM

- Hydraulic gear motor with integrated hydraulic valve block
- Protective cover for motor
- Self-leveling support w/ under plate mount
- Skid shoes
- 2400-3000 RPM rotor



"Y" blades (28)

GKR/SB - 2.5-4 Ton Mini Excavators

1.6" Cut Diameter
10-12 GPM

- Hydraulic gear motor with integrated hydraulic valve block
- Protective cover for motor
- Self-leveling support w/under plate mount
- Skid shoes
- 2350-2550 RPM rotor



"B" hammer blades (12)

CKT/SB – 4.5-5.5 Ton Mini Excavators

- Hydraulic gear motor
- Hydraulic valve block
- 2 Belt transmission w/protective cover
- 2200-2300 RPM rotor
- Self-leveling support with under plate mount
- Skid shoes



PARK/SB – 6-8 Ton Excavators

- Hydraulic gear motor
- Hydraulic valve block
- 2 Belt transmission w/protective cover
- 2200-2470 RPM rotor
- Self-leveling support with under plate mount
- Skid Shoes



CKT/FX – 5-7 Ton Excavators

- Hydraulic piston motor w/Hydraulic valve block
- Forestry rotor with fixed XF2 teeth and tungsten-carbide tips
- 2500-2600 RPM Rotor
- Under plate mount
- 3 Belt transmission w/protective cover
- Skid Shoes



PARK/FX – 7-11 Ton Excavators

- Hydraulic piston motor w/ Hydraulic valve block
- Smooth cut forestry rotor w/fixed XF2 teeth & tungsten-carbide tips
- 2500-2700 RPM Rotor
- Under plate mount
- 3 Belt transmission w/protective cover
- Skid Shoes



	Excavator Size	Cut Diameter	Cut Width	Hammers	GPM
CKTSB100	4.5-5.5 Ton	2"	36"	16 "B" Hammers	11-13
CKTFX100	7.5-9 Ton	3.5"	37"	37 XF2 Fixed Tooth	12-15

	Excavator Size	Cut Diameter	Cut Width	Hammers	GPM
PARKSB110	6-8 Ton	2.5"	40"	16 "D" Hammers	16-18
PARKFX100	7-11 Ton	5"	37"	37 XF2 Fixed Tooth	20-23

TFXSB – 11-16 Ton Excavators

8" Cut Diameter
28-30 GPM

- Hydraulic piston motor & valve block
- Double chassis
- Forestry rotor with fixed XF2 hammers and tungsten carbide tips
- Under plate mount & skid shoes
- 4 Belt transmission



EFXMDSB – 15-20 Ton Excavators

12" Cut Diameter
34-37 GPM

- Hydraulic piston motor & valve block
- Double chassis
- Forestry rotor w/ fixed XF1 hammers and tungsten carbide tips
- Under plate mount & skid shoes
- 4 Belt transmission





CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com

Effective: 01/19/2024

Revised: 06/12/2024

F.O.B. C&B



MULCHERS

SKID STEER MULCHERS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
KXSSL150	60" Skid Steer Mulcher - 23-27GPM, Fixed Tooth/Carbide Tips	1750	\$25,065.00
KXSSL150AVT	60" Skid Steer Mulcher - 22-29 GPM, Fixed Tooth/carbide tips, Automatic Variable Torque Piston Motor	1750	\$29,220.00
KXSSL170AVT	67" Skid Steer Mulcher - 22-29 GPM, Fixed Tooth/carbide tips, Automatic Variable Torque Piston Motor	1850	\$30,900.00
MXSSL160AVT	59" Skid Steer Mulcher - 26-35 GPM, Fixed Tooth/Carbide Tips, Automatic Variable Torque Piston Motor	2690	\$34,650.00
MXSSL180AVT	71" Skid Steer Mulcher - 26-35 GPM, Fixed Tooth Rotor/Carbine Tips, Automatic Variable Torque Piston Motor	2866	\$35,920.00
AFSSL160	63" Skid Steer Mulcher W/Hydraulic Side Shift - 23-25 GPM, Hammer	1550	\$13,300.00

SKID STEER FORESTRY MULCHERS

Hydraulic forestry mulcher **with fixed-teeth rotor**, for skid steer loaders from 70 - 120 HP. It is suited for land clearing, trail blazing and vegetation management up to 8".



KX/SSL AVT

- Mulching up to 6" in diameter
- Automatic variable displacement motor
- Universal skid-steer mount
- Skid shoes
- Hydraulic Rear hood adjustment



MX/SSL AVT

- Mulching up to 8" in diameter
- Automatic variable displacement motor
- Universal skid-steer mount
- Skid shoes
- Hydraulic Rear hood adjustment



AF/SSL W/ Hydraulic Side Shift

- Mulching up to 2.5" in diameter
- Hydraulic side shift with hoses and diverter valve
- Floating self-leveling support frame
- Adjustable rear roller
- Skid Shoes

	Working Width	Actual Width	# of Belts	Motor	# of Teeth	Flow	HP	Weight
KXSSL 150	60"	70"	3	Hydraulic Piston	57 XF2 Hammers	23-37 GPM	50-90	1700 lbs.
KXSSL 150 AVT	60"	70"	3	AVT	57 XF2 Hammers	23-26 GPM	50-90	1700 lbs.
KXSSL 170 AVT	67"	78"	3	AVT	65 XF2 Hammers	23-29 GPM	50-90	1850 lbs.
MX/SSL 160 AVT	59"	76"	4	AVT	42 XF1 Hammers	32-42 GPM	70-120	2690 lbs.
MX/SSL 180 AVT	71"	83"	4	AVT	42 XF1 Hammers	32-42 GPM	70-120	2866 lbs.
AF/SSL 160	61"	72"	3	-	Hammers	23-25 GPM	50-90	1550 lbs.

100-120 LEHIGH AVE.
P.O. BOX 928
BATAVIA, NY 14021
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE
CARLISLE, PA 17015
PHONE: 800-222-8969
FAX: 717-249-9384



CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com

Effective: 01/19/2024

Revised: 02/23/2024

F.O.B. C&B



MULCHERS PTO MULCHERS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
KX150	60" PTO Mount Mulch Head - CAT I/II, XF2 (Carbide) Fixed Tooth Rotor	1785	\$20,080.00
TAMF180	70" 1000 PTO Front/Rear Mount Mulcher - Hammer Blades, Joystick Control	3000	\$32,600.00
FBG380S	31.5" PTO Mount Boom Mulcher - Y Blades, 4 Lever Cable Control		\$16,645.00
KX150PUSHFRAM E	Push Frame - Mechanical Guard For KX150	300	\$935.00

PTO FORESTRY MULCHING



KX150

- Fixed 3-Point, CAT I-II
- Hydraulic adjustment of rear hood
- Double free wheel gearbox with 1-3/8" input shaft
- Fully automatic belt adjustment
- Adjustable skid shoes
- Double chassis
- Counter blades
- 540 RPM PTO
- Protection guards on EC directives

OPTIONS:

Push Frame

TAMF

- 1.5-2" in diameter
- 3-Point, CAT I-II with push-mode float device
- Front or rear version
- Double free wheel in the gearbox and through shaft
- Full automatic belt tensioner
- Hydraulic side-shift on chrome tubes
- Double chassis main body
- Hydraulic cylinder for head tilt/height adjustment, with float device and lock valve
- Self-cleaning rear roller w/height adjustment
- Counterblades (2x)
- 1000 RPM PTO
- Protection guards on EC directives

FBG Hydraulic Boom Mower

- 3-Point, CAT I
- Oil Cooler
- Reversible rotor rotation
- Adjustable roller
- Y Blades
- Cable Controls with 4 levers
- Front, reverse or left hand mounting
- Hydraulic breakaway with adjustable valve
- Floating system on the first arm and roller
- Removable front hood of the flail head
- 190 Degree Inclination

	Working Width	# of Belts	Type of Teeth/Blades	HP	Weight
KX150	60"	4	48 - XF1 Hammers	60-110	1785 lbs.
TA/MF180	70"	4	16- "P" Hammers	90-160	1470 lbs
FBG380S	31.5	N/A	32 - "Y" Blades	30-50	510 lbs.

REPLACEMENT TEETH & HAMMERS

ITEMNUMBER	DESCRIPTION	PRICE
B12HAMB	Hammer-Flail (Type "B") - 12 Pack For GKR/SB, CKT/SB Models	\$145.00
MG4837	Hammer-Flail (Type "B") - For GKR/SB, CKT/SB Models	\$20.00
120200006	Hammer-Flail (Type "D") - For PARK/SB Models	\$19.99
120200001	Hammer-Flail (Type "A") - For TAS, TAPS, AF/SSL Models	\$27.99
120100013	"Y" Blade - For NKR/SB Models	\$4.99
B12XF1	Fixed Tooth "XF1" - Tungsten Carbide Tips, 12 Pack, For MX/SSL, EFX/MD, TFX/SB	\$1,739.00
DF6246	Fixed Tooth "XF1" - For EFX/MD - TFX/SB Models	\$175.00
B12XF2	Fixed Tooth "XF2" - 12 Pack, For KX/SSL, KX, CKT/FX, PARK/FX Models	\$1,019.00

100-120 LEHIGH AVE.
P.O. BOX 928
BATAVIA, NY 14021
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE
CARLISLE, PA 17015
PHONE: 800-222-8969
FAX: 717-249-9384