




# CUMMINGS & BRICKER

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 02/01/2022

Revised: 08/01/2022

F.O.B. C&B



**enorossi** Click here for ordering programs-Select Program #2/#2C from Bookmarks.

## 3PT MOUNTED SICKLEBAR MOWERS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
BF135	52" Manual Lift (Compact Cat I 3 point)	410	\$6,123.00
BF135H	52" Hydraulic Lift (Compact Cat I 3 point)	420	\$6,333.00
BF150	59" Manual Lift (Compact Cat I 3 point)	430	\$6,264.00
BF150H	59" Hydraulic Lift (Compact Cat I 3 point)	440	\$6,474.00
BF150HL	BF135/BF150 Hydraulic Lift Kit (Included with "H" models)	45	\$564.00
BF180RT	71" Manual Lift (Individual Replaceable Guard Sections)	560	\$7,025.00
BF180HRT	71" Hydraulic Lift (Individual Replaceable Guard Sections)	560	\$7,229.00
BF210RT	83" Manual Lift (Individual Replaceable Guard Sections)	585	\$7,142.00
BF210HRT	83" Hydraulic Lift (Individual Replaceable Guard Sections)	585	\$7,346.00
BFHL	BF180/210 Hydraulic Lift Kit (Included with "H" models)	45	\$558.00
BF240HRT	94" Hydraulic Lift (Individual Replaceable Guard Sections)	618	\$8,497.00
BF270HRT	106" Hydraulic Lift (Individual Replaceable Guard Sections)	740	\$8,690.00

### Setup on sicklebar mowers - \$150

- 540 RPM to Belt Drive-No Pitman
- CAT I 3point Hitch
- Double Sicklebar w/Alternating Movement
- Spring Loaded Breakaway Protection
- Operates up to 75 Degrees Down and 90 Degrees Up
- Extra Sicklebar Included
- Blade Protection for Transport Included
- All Units Crated-2per Crate
- BF180HRT, BF210HRT, BF240HRT and BF270HRT are standard with individually replaceable guard sections.

Model	Cutting Width	Min HP Required	Weight	Working Speed (Max)
BF135/H	52"	12	430	6MPH
BF150	59"	12	441	6MPH
BF180HRT/RT	71"	25	583	10MPH
BF210HRT/RT	83"	25	634	10MPH
BF240HRT	94"	40	673	10MPH
BF270HRT	106"	40	711	10MPH



"Wobble" Drive – no pitman



Spring Loaded Breakaway



# CUMMINGS & BRICKER

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 02/01/2022

Revised: 08/01/2022

F.O.B. C&B



## 3PT MOUNTED DISC MOWERS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
DM42	Disc Mower-4 Disc-2 Blade/Disc-5'5" Working Width	927	\$11,314.00
DM43	Disc Mower-4 Disc 3 Blade/Disc-5'5" Working Width	927	\$11,476.00
DM52	Disc Mower-5 Disc-2 Blade/Disc-6'7" Working Width	1015	\$11,894.00
DM62	Disc Mower-6 Disc-2 Blade/Disc-8' Working Width	1103	\$12,488.00
DM63	Disc Mower-6 Disc-3 Blade/Disc-8' Working Width	1103	\$12,647.00
DMP72	Disc Mower-7 Disc-2 Blade/Disc-9' Working Width	1413	\$15,897.00
DMP82	Disc Mower-8 Disc-2 Blade/Disc-10'5" Working Width	1523	\$16,897.00
DMP83	Disc Mower-8 Disc-3 Blade/Disc-10'5" Working Width	1523	\$17,060.00
18036259	Long Wearing Skids - DM/DMP/DMC Mowers		\$74.49

Setup on disc mowers: \$200

### STANDARD FEATURES

- Individual shear hub system on cutter bar
- Easy Changing hubs with 4-bolt disc cutting unit
- Compensation spring "break-away" system
- Heavy duty shielded PTO shaft with overrunning clutch
- Maximum mowing angle from -30° up to 45°
- Hydraulic cylinder lift mechanism standard
- High blade tip speed for smooth, fast cutting efficiency
- Easy "Sneak-A-Peek" belt tension viewer for less down time

Model	# of Discs	# of Blades	PTO	Cutting Width	Min. HP.	Weight
DM42	4	8	540 RPM	5'5"	35HP	927 LBS.
DM52	5	10	540 RPM	6'7"	40HP	1015 LBS.
DM62	6	12	540 RPM	8'	50HP	1103 LBS.
DMP72	7	14	540 RPM	9'2"	60HP	1413 LBS.
DMP82	8	16	540 RPM	10'6"	70HP	1523 LBS.

\* Special order: 4,6, and 8 disc models are available with 3 bladed triangular discs- -extra charges apply



Heavy duty "A" frame



Anti-wrap support



Disc type swath board



Shear hub spindle



Top service hubs



## 3PT DISC MOWER CONDITIONERS

### DMC & TREX DISC MOWER / CONDITIONERS FEATURES

Rear-mount and hydraulic side shift models available.



Rubber Roller Conditioner



Tine Conditioner



ENOCUT cutting bar system

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
DMC5	Disc Mower Conditioner - 5-2 Blade Disc, 6'7" Working Width	1760	\$20,239.00
DMC62	Disc Mower Conditioner - 6-2 Blade Discs, 8' Working Width	1870	\$22,175.00
DMC63	Disc Mower Conditioner - 6-3 Blade Discs, 8' Working Width	1907	\$22,334.00
18036259DMC	Long Wearing Skids - DM/DMP/DMC Mowers		\$74.49

### DMC MOWERS WITH CONDITIONER

Rear-mounted disc mower equipped with hydraulic lift, automatic safety release to protect the bar from any obstacles, over running drive shaft, protection cover and swath disc. High quality steel ENOCUT cutting bar, a system totally manufactured in-house by Enorossi. Equipped with a ROLL conditioner.



	# of Discs	# of Blades for Disc	HP	Working Width	PTO
DMC5	5	2	70-80 HP	6.7'	540 RPM
DMC62	5	2	80-90 HP	8'	540 RPM
DMC63	5	3	80-90 HP	8'	540 RPM

## FRONT MOUNT DISC MOWER CONDITONER

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
ENOSTORM300	9'10" Front Mount Mower - 7 Disc Tine Conditioner, 540RPM, Long Wearing Skids Included	2006	\$20,739.00

The compact design of the Enostorm 300 allows it to adapt to all types of ground conditions. The shape of the hitch is carefully designed bringing the center of gravity as close as possible to the tractor.

### Spring Compensation System

Two strong compensation springs guarantee a uniform pressure on the ground along the entire cutterbar. The optimum pressure on the ground can be quickly adjusted.



	Number of Discs	Working Width	Number of Knives	RPM	HP
ENOSTORM 300	7	9.8'	2 per disc	540 RPM	60 HP



## PULL TYPE DISC MOWER CONDITIONERS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
TREX250R	8'3" Side Pull Disc Mower Conditioner - Rubber Rollers, Long Wearing Skids Included	3634	\$35,615.00
TREX290CPR	9'7" Center Pull Mower - Roller Conditioner		\$41,085.00
TREX290CPS	9'7" Center Pull Mower - Tine Conditioner		\$40,513.00
TREX320CPR	10'6" Center Pull Disc Mower Conditioner - Rubber Roller, Long Wearing Skids Included		\$42,854.00
TREX320CPS	10'6" Center Pull Disc Mower Conditioner - Tine Conditioner, Long Wearing Skids Included		\$38,889.00
TREX320CPNC	10'6" Center Pull Disc Mower - No Conditioner, Long Wearing Skids Included		\$33,757.00
TREXDBHITCH	Drawbar Hitch - TREX Mowers		

**SPECIFY 2 Point Swivel Hitch OR Drawbar Hitch (Same Price)**

### TREX DISC MOWER CONDITIONER

A side hydraulically shifted drawbar is the main feature of the disc mower conditioners. The TREX also features a block valve to ensure a secure locking system and a perfect cutting can be assured with the Enocut cutting bar system.

**STANDARD:** tires 340/55-16 12PR & second wide angle PTO shaft & gearbox.



	# of Discs	Conditioner Type	HP	Working Width	Weight
TREX250R	6	Roller	55-65 HP	7.8'	3215 lbs.
TREX250S	6	Tine	55-65 HP	7.8'	3634 lbs.
<b>CENTER PULL MODELS</b>					
TREX290CPR	7	Roller	60-65 HP	9.6'	3970 lbs.
TREX290CPS	7	Tine	60-65 HP	9.6'	3815 lbs.
TREX320CPR	8	Roller	75-85 HP	10.5'	4300 lbs.
TREX320CPS	8	Tine	75-85 HP	10.5'	4150 lbs.

## DRUM MOWER

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
BT165M	5'5" Drum Mower - Manual Fold	795	\$8,035.00
BT165H	5'5" Drum Mower - Hydraulic Fold	835	\$8,751.00
BT185M	6'1" Drum Mower - Manual Fold	894	\$8,417.00
BT185H	6'1" Drum Mower - Hydraulic Fold	935	\$9,133.00

**Setup on Drum Mower: \$200**

Rear-mounted drum mower available in two working widths 5.5' & 6.1'. Machine features high speed discs allow high quality cutting performance, mechanical or hydraulic lifting systems with cabin control, fast and efficient blades replacement device. Provided with cardan shaft, pulley with over running clutch, protection cover and automatic safety release.



Model	Working Width	# of Drums	# of Knives	Hitch	PTO	HP
BT165	5.5 ft.	2	6	Cat 1 & 2	540RPM	50
BT185	6.1 ft	2	6	Cat 2	540 RPM	75

Available in Manual or Hydraulic



Belt tensioner



Heavy duty 3 point hitch



Replaceable knives



# CUMMINGS & BRICKER

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 02/01/2022

Revised: 08/01/2022

F.O.B. C&B



## TEDDERS

### PULL TYPE TEDDERS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
G2310PTH	10'3" Tedding Width, 2 Rotors	420	\$4,301.00
G4520PTH	Tedder 17' Pull Type-Hydraulic Lift Mech Drawbar Tilt	1146	\$10,212.00
G4570PTH	Tedder 19' - 4 Rotor, Hydraulic Lift/Tilt	1157	\$11,692.00
G6740PTH	Tedder 24' - 6 Rotor, Hydraulic Lift/Tilt	1740	\$16,724.00
G8980PROFILINE	Tedder 33' - 8 Rotor, Trailed On Trolley		\$33,861.00
G6740PROFILINE	Tedder 24' - 6 Rotor, Trailed On Trolley	3300	\$29,889.00

### 3 PT TEDDERS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
G23103PH	Tedder 10' 3PH - 2 Rotor	419	\$4,497.00
G45203PH	Tedder 17' 3PH- Hydraulic Lift	1322	\$11,860.00
G67403PH	Tedder 24' 3PH - 6 Rotor	1917	\$16,883.00

### TEDDER OPTIONS

ITEMNUMBER	DESCRIPTION	PRICE
18030644	Tine Saver (Each)	\$14.94
G4HYDTILT	Hydraulic Drawbar For G4 Vortex	\$860.00

Setup on Tedders: G2-\$200, G4-\$400, G6-\$400, G6 TROLLEY \$800, G8 TROLLEY \$1,000

## ENOROSI VORTEX TEDDERS

are heavy duty and get the job done. Providing tedding widths from 10' to a full 24', Vortex tedders are the perfect solution for gentle yet fast hay crop management.

**G2 TEDDER** spreads, aerates and turns all types of forage and are ideal for small farms. Standard with safety guards, PTO w/slip clutch, flexible steel teeth, oil bath gear box.

**G4 & G6 TEDDERS** come standard with U-Joint style rotors for better tedding and less problems. Also standard with safety guards, heavy duty PTO w/slip clutch, flexible steel teeth, grease lubricated unit.



Tilting adjustment during working



Oil bath gearbox.



All around safety guards.

MODEL	WORKING WIDTH	HORSE POWER	TIRES	# OF ARMS/TEETH	# OF TINES PER ROTOR
G2LP	10' 3"	20	2 x 15.600/6	12/12	6
G4VORTEXP	17'	20-30	4 x 16.65/8	24/24	6
G4VORTEX19	19'	20-30	2 x 18.5 x 8.5/8 on center rotors & 2 x 16.65/8 on lateral rotors	24/24	6
G6VORTEX24	24'	30-40	4 x 18.85/8 on central rotors mounted on tandem axles plus 4 x 16.65/8 on lateral rotors	36/36	6
G624TROLLEY	24'	50-60	2 x 340/55-16 trolley transport tires, 6 x 16.65/8 on lateral rotors	36/36	6

Models Available in 3 Point Hitch and Pull Type



G2 Tedder



G4 Tedder



G6 Tedder



G6 Trolley

100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



# CUMMINGS & BRICKER

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 02/01/2022

Revised: 08/01/2022

F.O.B. C&B



## ROTARY RAKES

### Pull Type Rotary Rakes

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
RR420EVO	Rotary Rake 13'9" - 11 Arms w/4 Tines Per Arm	1375	\$12,180.00
8020451ILO	Wide Angle PTO For RR420EVO Rake - In Lieu Of Standard		\$780.00

### Double Rotary Rake

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
ENODUO780	Double Rotary Rake 23-26' - 11 Arms Per Rotor, Center Delivery, 70-80 Hp	3951	\$37,165.00
ENODUOTRACER	Double Rotary Rake - 25'6" Offset Rake, To One Side Or 2 Windrows	4084	\$41,939.00

Setup on rakes: \$350 single rotor / \$700 double rotor

MODEL	# of ARMS	TINES	HP	WORKING WIDTH	TRANSPORT WIDTH
RR320	8	24	25-35	10.5'	3.6'
RR350	9	27	30-40	11.5'	3.6'
RR420EVO	11	44	40-45	14"	6'5"
ENODUO610	9	54	70-100	20'2"	8'2"
ENODUO660	11	66	100-120	21'4"	8'2"
ENODUO780	22	88	70-80	Up to 23-26'	8'2"
ENODUOTRACER	22	88	55	25'6"	8'5"

**FEATURES:** PTO with slip clutch, oil bath gearbox, pivoting headstock, and mechanic crank for working height adjustment on the 3 point hitch.



RR320



RR350



RR420EVO



ENODUO610-660



ENODUO780



ENODUOTRACER

### 3 PT Rotary Rakes

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
RR320	Rotary Rake 10'6" - 9 Arms, 3PH	782	\$6,942.00
RR320T	Rotary Rake 10'6" - 9 Arms W/Tandem Wheels	782	\$8,151.00
RR350	Rotary Rake 11'5" - 9 Arms w/Pivoting Headstock	827	\$8,956.00
RR420EVO3P	Rotary Rake 13'9" - 11 Arms w/ Pivoting Headstock	1323	\$11,859.00

### Double Rotary Rake

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
ENODUO610	Double Rotary Rake 20' - 9 Arms Per Rotor, Center Delivery, 70-100HP	1929	\$21,440.00

100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



## COMBINATION TEDDER-RAKE


ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
TOP300	10' Windrow Rotary Rake/Tedder - 3PH	673	\$8,160.00
DR4204R	Rake - Tedder Combo	1104	\$13,569.00

**Setup on Combination Tedder-Rakes 300: \$200**


### TOP 300 Tedder-Rake

A tedder-rake combination with adjustable horizontal tines that float through the stubble to move all the crop.


The TOP 300 has both wide and narrow tines that provide a wide working surface. The machine follows the path of the tractor in turns, without damaging the swath, thanks to the pivoting headstock. When lifted, the machine automatically locks in the central position for safe handling on slopes.

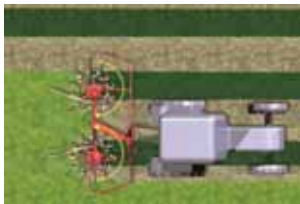


Spreading and tedding, working with 9' 10"



When tedding around boundaries, the crop detector prevents losses.

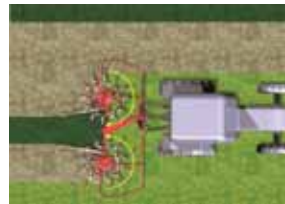

Single swath raking, working width 9' 10".

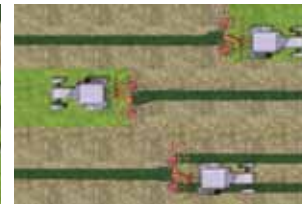

Double swath raking, working width 19' 8".


### DR420R Combination Tedder Rake

Ideal for medium-sized farms that want to obtain both central and lateral windrows depending on the quantity of harvested material.

Raking width up to 13' 10", tedding width up to 11' 10". Working speeds up to 10 mph.




Spreading action

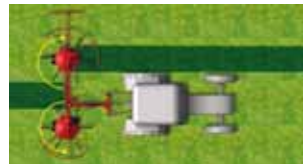

Tilting Action



Lateral windrow

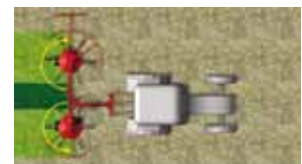

Central windrow




**FINGERWHEEL RAKES****3PT HITCH IN-LINE WHEEL RAKES**

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
RP2C	Two Wheel Rake - 4'3" Working Width, Standard With 55" Diameter Rake Wheels	190	\$1,583.00
RP3C	Three Wheel Rake - 6'5" Working Width, Delivers To The Right, Standard With 55" Diameter Rake Wheels	199	\$1,723.00
RP4	Four Wheel Rake - 8'5" Working Width, Standard With 55" Diameter Rake Wheels	375	\$2,263.00
RP5	Five Wheel Rake - 11'2" Working Width, Standard With 55" Diameter Rake Wheels	440	\$2,928.00

**Setup on Fingerwheel Rake: \$200**

Ease of use and efficiency make this rake suitable for any type of forage. The spring system allows the rake wheels to adapt to any ground with the correct pressure without affecting the forage quality. Independent and interchangeable raking wheels are mounted on tapered roller bearings.

Model	Number of Wheels	Teeth Per Wheel	Working Width		Weight Lbs.
			Raking	Turning/Spreading	
RP2C	2	40	4'3"	4'3"	199
RP3C	3	40	6'5"	6'9"	199
RP 4	4	40	8'5"	9'5"	375
RP 5	5	40	11'2"	12'2"	440
RP 6	6	40	13'4"	14'5"	570

**INLINE WHEEL RAKES**

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
RT7	Seven Wheel Inline Rake - 14' Working Width, Standard With 60" Diameter Rake Wheels	1444	\$9,982.00
RT9	9 Wheel Inline Rake - 18' Working Width, Standard With 60" Diameter Rake Wheels	1623	\$10,855.00
RT13	13 Wheel Inline Rake - 25' Working Width, Standard With 60" Diameter Rake Wheels	2759	\$17,517.00
18031117	Extend RT7 To 9 Wheel, 60" Wheel Diameter		\$686.00
RTHS	Hydraulic Steering Kit For Rear Wheels RT7 Or RT9		\$774.00

**INLINE PULL TYPE HAY RAKES**

Inline rakes with 2 ground wheels (4 ground wheels, on the RT13). Working width can be adjusted hydraulically on the RT13 models with a selector on the RT7-9. Rake wheels feature hydraulic lift. Transition from raking to transport position directly from the tractor's seat.



Model	Number of Wheels	Working Width	Transport Width/Length	Weight Lbs.
RT7	7	14'	8'2"/25'	1444
RT9	9	18'	8'2"/31'	1623
RT13	13	25'	8'2"/39'	2759





**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 02/01/2022

Revised: 08/01/2022

F.O.B. C&B



## FINGERWHEEL RAKES


### PULL TYPE CARTED V-RAKES

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
RP8C	8 Wheel Carted V-Rake - 17'8" Working Width, Standard With 55" Diameter Rake Wheels	1305	\$8,371.00
RP10C	10 Wheel Carted V-Rake - 21' Working Width, Standard With 55" Diameter Rake Wheels	1470	\$9,451.00
RP12C	12 Wheel Carted V-Rake - 24'3" Working Width, Standard With 55" Diameter Rake Wheels	1624	\$10,354.00
18031090	Single Side Opening Kit For RP8C-10C-12C		\$106.00
RPKW	Kicker Wheel, Hyd Fold - For RP8C-10C-12C		\$783.00

#### CARTED V-Rake

The economical choice for V-rakes. Clean raking when working on uneven terrains. Hydraulic device for moving from transport to working position and vice versa in seconds. Width adjustment with manual selector.

**OPTIONAL:** ball valve kit and hydraulic central kicker wheel.

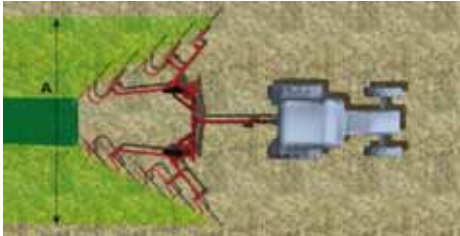

Model	Number of Wheels	Working Width	Transport Width/Length	Weight Lbs.
RP8C	8	17'8"	8'2"	1305
RP10C	10	21'	8'2"	1470
RP12C	12	24'3"	8'2"	1624



## FINGERWHEEL RAKES

### HIGH CLEARANCE CARTED V RAKES - BAT RAKES

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
BR8	Bat Rake 8 Wheel - 16'5" - 18'5" Working Width, Standard With 60" Diameter Rake Wheels	1237	\$11,725.00
BR10	Bat Rake 10 Wheel - 18'8" - 21'8" Working Width, Standard With 60" Diameter Rake Wheels	1367	\$12,439.00
BR12	Bat Rake 12 Wheel - 19'8" - 24'3" Working Width, Standard With 60" Diameter Rake Wheels	1554	\$13,469.00
18032136	Center Kicker Wheel For Bat Rakes		\$822.00
18036995	Tandem Wheel Kit - Bat Rakes		\$1,121.00
18032903	Hydraulic Windrow Width - Batrake		\$1,448.00
18033275	Extension Kit - Extends BR8 To 10 Wheel Rake, 60" Wheel Diameter		\$745.00
18032685	Extension Kit - Extends BR10 To 12 Wheel Rake, 60" Wheel Diameter		\$1,079.00

### SPECIFICATIONS

Setup on Batrakes: \$400

Model	BR8	BR10	BR12
Working width-min/max	16'5"-18'5"	18'8"-21'8"	19'8"-24'3"
Transport width		9'2"	
Transport height		8'2"	
Ground clearance		32"	
Windrow width-min/max		3'-7'	
Weight (lbs)	1237 LBS	1367 LBS	1554 LBS
# of Wheels/Diameter	8/60"	10/60"	12/60"
Tine diameter		7mm	
Transport tires		205/70-15	

### Carted V-Rake - BATRAKE®

Enoagricola Rossi offers the latest innovation in High Capacity Caddy Rakes with the **BATRAKE**.

Available in 8, 10, and 12 wheel sizes. 60" diameter wheels with 7mm spring tines provide clean raking, excellent wear, and strong resistance to breakage. The heavy frame and high profile of the BATRAKE give a full 32" of ground clearance allowing it to rake in all types of ground contours in heavy hay conditions. The BATRAKE's unique lifting system gives you the ability to partially raise the rakes at headlands, rather than into the full transport position. A single hydraulic hose allows it to be used on older tractors with limited hydraulic remotes. Go from a V rake configuration to single side without leaving the tractor seat.



Tilting Tie Rod



Telescopic Frame



Hydraulic Cylinders to transition from working position to transport position



Rake Wheel Pressure Adjustment



Open-Close Working



Central Raking Wheel

**FINGERWHEEL RAKES****HIGH CLEARANCE PULL TYPE V RAKES**

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
MAXIMUS12	High Clearance V Rake - 12 Wheel, Standard With 60" Diameter Rake Wheels	3064	\$20,161.00
MAXIMUS14	High Clearance V Rake - 14 Wheel, Standard With 60" Diameter Rake Wheels	3306	\$20,854.00
MAXIMUS16	High Clearance V Rake - 16 Wheel, Standard With 60" Diameter Rake Wheels	3748	\$22,926.00
18036130	Extension Kit - Extends MAXIMUS12 To 14 Wheel Rake **Add 18036284 In Addition To This Kit To Turn MAXIMUS12 Into A 16 Wheel Rake**		\$1,624.00
18036284	Extension Kit - Extends MAXIUS14 To 16 Wheel Rake		\$2,072.00
18036820	Central Kicker Wheel - For Hydraulic Maximus Rakes		\$1,895.00

**BI-FOLD WHEEL RAKES**

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
EASYRAKE10	Bi-Fold Rake - 10 Wheel, Standard With 60" Diameter Rake Wheels	2870	\$18,920.00
EASYRAKE12	Bi-Fold Rake - 12 Wheel, Standard With 60" Diameter Rake Wheels	3046	\$19,719.00
EASYRAKE14	Bi-Fold Rake - 14 Wheel, Standard With 60" Diameter Rake Wheels	3709	\$22,694.00
EASYRAKE16	Bi-Fold Rake - 16 Wheel Superstar, Standard With 60" Diameter Rake Wheels, Auto Steer	5180	\$32,569.00
EASYRAKE18	Bi-Fold Rake - 18 Wheel Superstar, Standard With 60" Diameter Rake Wheels, Auto Steer	6945	\$40,793.00
EASYRAKE20	Bi-Fold Rake - 20 Wheel Superstar, Standard With 60" Diameter Rake Wheels, Auto Steer	7385	\$42,084.00
EASYRAKE22	Bi-Fold Rake - 22 Wheel Superstar, Standard With 60" Diameter Rake Wheels, Auto Steer		\$48,007.00
ERTANDEM	Tandem Wheels - For Easy Rakes 10/12/14		\$1,513.00
18032111	Kicker Wheel - For Easy Rake - Double Wheel		\$1,729.00
18032073	Extension Kit - Extends ER10 To 12 Wheel Rake **Add 18032083 In Addition To This Kit To Turn ER10 Into A 14 Wheel Rake**		\$1,190.00
18032083	Extension Kit - Extends ER12 To 14 Wheel Rake		\$2,584.00

**OPTIONS FOR ALL WHEEL RAKES**

ITEMNUMBER	DESCRIPTION	PRICE
18032659	Wind Guard - Per Wheel For All Rakes	\$46.00
18032660	Wind Guard For Kicker - V Rakes	\$46.00

**Maximus Rake** features independent rake wheel arms using a unique double rod spring system to maintain constant pressure of rake wheels to ground. Hydraulic opening/closing and heavy duty frame with wide space between wheels and tires.

**Easy Rake** has an innovative auto steer system allows you to work with ease in small plots following the path of the tractor, reaching steering angles of 90 degrees. Mechanical windrow width adjustment.

**Easy Rake Superstar** is suitable for large productions and all working conditions. Rake wheels are mounted in front with innovative auto steer system following the path of the tractor. Mechanical windrow width adjustment.



Model	Number of Wheels	Working Width	Transport Width / Length	Weight Lbs.
MAXIMUS12 High Clearance V Rake	12	24'	8'3" / 25'5"	3064
MAXIMUS14 High Clearance V Rake	14	27'	8'3" / 25'5"	3306
MAXIMUS16 High Clearance V Rake	16	30'	8'3" / 27'2"	3748
EASYRAKE10 Bi-Fold	10	21'	8' / 22'	2870
EASYRAKE12 Bi-Fold	12	24'	8' / 25'	3046
EASYRAKE14 Bi-Fold	14	27'	8' / 31'	3709
EASYRAKE16 Bi-Fold	16	32'	9'2" / 34'	5180
EASYRAKE18 Bi-Fold	18	35'	9'2" / 37'	6945
EASYRAKE20 Bi-Fold	20	38'	9'2" / 40'	7385



## Basket Bar Rake

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
CR850	28'6" Basket Bar Rake - Self-Contained PTO Pump, Hydraulic Drive	7716	\$51,548.00
18038042	Center Kicker Wheel - For CR850 Models		\$3,019.00

### Basket Bar Rake

The CR 850 basket bar rake has been designed to harvest the best possible quality forage.

The multiple tines ensure the collection of the product, forming a soft swath completely free of impurities; the seven-bars maximize performance even in conditions of high forage volumes. The self-steering system is hydraulic and standard for maximum maneuverability, transport is quick and easy thanks to the transport width of only 8' 6" feet.



- Self-steering system
- One side raking
- Self-Contained PTO Pump



CR850	
Working width minimum/maximum	14.7 - 28.6'
Working Width/Windrow width adjustment	Hydraulic
Windrow width adjustment Min/Max	3.2 – 6.56'
Minimum power required	80 HP
Disc Diameter	2.8'
# of Bars	7
Bar Length	12'
# of Tines	34
Speed of rotation	60-90 RPM
Basket Movements	Hydraulic
Tine pressure	Spring
Tires	340/55 R16
Basket tires	4 X 18.5X8.5-8
Transport Height/Width/Length	6.9' / 8' 6" / 25.6'
Hitch	Semitrailed



## BALE WRAPPERS

ITEMNUMBER	DESCRIPTION	PRICE
BW150	Bale Wrapper W/ End Tip Kit - Stationary, CAT II 3 Point	\$8,891.00

The BW150 bale wrapper is a stationary, CAT II, 3 point machine with hydraulic rotation. It's ideal for farmers wrapping fewer than 400 bales a year. Capable of wrapping a bale in under two minutes.

Comes standard with end tip kit. Monitor with three presets, audible alarm, and revolution counter. Requires one set of hydraulic remotes.

**BW150 Stationary Wrapper Specifications**

Required Horse Power	45 HP
Machine Dimensions (L x W x H)	8.5' x 4' x 5.6'
Bale Dimensions (L x W x H)	4' x 5'
Max Bale Weight	2,200 lbs.
Film Width	20/30 inches
Controls	Electronic Control
Weight	990 lbs.



Control Box





## Agreto Hay & Straw Moisture Meter

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
AGFH0013	10" HFM II Hand Held Moisture Tester Probe	2	\$450.00
AGFH0010	20" HFM II Hand Held Moisture Tester Probe	2	\$499.00
AGFH0011	40" HFM II Hand Held Moisture Tester Probe	2.5	\$525.00
AGFP0010	Baler Mounted Moisture Monitor Universal Mounting-With Monitor	3.5	\$679.00

### HAY & STRAW MOISTURE METERS

Professional measuring instruments for determining moisture and temperature of baled hay or straw.

#### Handheld Moisture Meter

Easy moisture control with ongoing display of the readings during the measurement procedure for rapid moisture measurement at different locations within the bale.

- Ergonomically shaped wooden handle
- Moisture range 9 to 70%
- Temperature range 32° F to 212° F
- 13mm LCD display
- Adjustable alert function
- No calibration necessary
- Power supply with 9 V battery



#### Baler-Mounted Moisture Meter



For farmers and contractors who want control of their moisture content during the baling process.

- Robust construction, high quality materials
- Splashproof display
- Stainless steel mounting bracket
- Backlit LCD display with 13mm high digits
- 0.8% Accuracy
- Measuring range from 9 to 70%
- Ongoing display of the measured value
- Adjustable alert function
- No calibration necessary
- Sensor plate of high-strength plastic
- Sturdy sensor mounting with 4 screws M8